

A 1226 B 160 C 60 (mm)

**Technical specification**

Fluorescent tube, T5 fixture. Integrated electronic ballast. Low weight aluminum housing. High quality reflector with flood beam spread. Mounting options for wire (horizontal and pendulum), fixed mounting and track mounting.

**Model and colours**

Available in white.

**Area of use**

Fluorescent light for indoor applications, suitable for general lighting.

**Accessories**

Bracket for wire and tracks.

**Technical data**


Mains (input) voltage	220-240 V
Total weight	3,8 kg
Form of protection	IP 20, class I
Operating position	Vertical
Lamp holder	G5
Energy consumption	62 / 119 W
Control gear	Electronic
Start time	Instant
Ballast	Built in
Reflector	High efficiency anodized reflector
Beam spreads	Flood

Art no	Description	Colour
141-01	Plain 2x28W / 2x54W, Flood	White
141-500-10	Plain 2x28W / 2x54W, Flood, with track mounting kit.	White
141-24	Plain 2x28W / 2x54W, Flood, 1-10V Dim.	White
141-20-10	Mounting clip horizontal wire kit.	White
141-21-10	Suspension kit wire	White

**Note**

Special versions can also be produced depending on quantity. Final shipping destination may require minor modifications of components as well as catalogue numbers, be sure to state the country in which the fixtures will be used.

**Flood, 2\*28W**

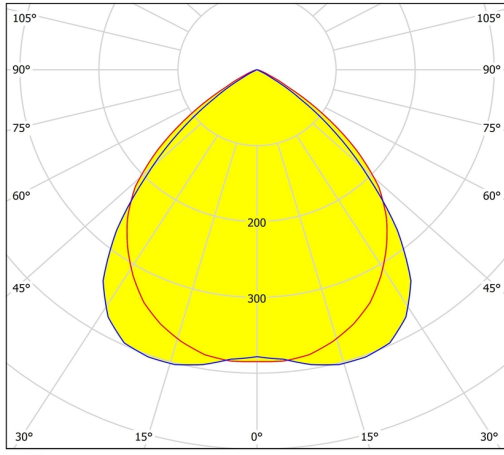


cd/klm  
 — C0 - C180 — C90 - C270

Distance [m]	Cone Diameter [m]	Illuminance [lx]
0.5	0.99	E(0°) 8000
	1.08	E(C90) 44.7° 1515
		E(C0) 47.3° 1250
1.0	1.98	E(0°) 2000
	2.17	E(C90) 44.7° 379
		E(C0) 47.3° 313
1.5	2.97	E(0°) 889
	3.25	E(C90) 44.7° 168
		E(C0) 47.3° 139
2.0	3.96	E(0°) 500
	4.33	E(C90) 44.7° 95
		E(C0) 47.3° 78
2.5	4.95	E(0°) 320
	5.42	E(C90) 44.7° 61
		E(C0) 47.3° 50
3.0	5.94	E(0°) 222
	6.50	E(C90) 44.7° 42
		E(C0) 47.3° 35

Distance [m] Cone Diameter [m] Illuminance [lx]  
 — C0 - C180 (Half-value Angle: 94.6°)  
 — C90 - C270 (Half-value Angle: 89.4°)

**Flood, 2\*54W**

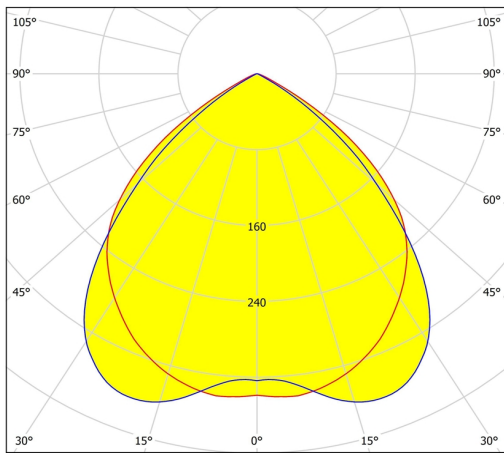

cd/klm  
 — C0 - C180 — C90 - C270

Distance [m]	Cone Diameter [m]	Illuminance [lx]
0.5	1.00	E(0°) 12068
	1.13	E(C90) 44.9° 2322
		E(C0) 48.6° 1764
1.0	1.99	E(0°) 3017
	2.27	E(C90) 44.9° 580
		E(C0) 48.6° 441
1.5	2.99	E(0°) 1341
	3.40	E(C90) 44.9° 258
		E(C0) 48.6° 196
2.0	3.99	E(0°) 754
	4.54	E(C90) 44.9° 145
		E(C0) 48.6° 110
2.5	4.98	E(0°) 483
	5.67	E(C90) 44.9° 93
		E(C0) 48.6° 71
3.0	5.98	E(0°) 335
	6.81	E(C90) 44.9° 64
		E(C0) 48.6° 49

Distance [m] Cone Diameter [m] Illuminance [lx]  
 — C0 - C180 (Half-value Angle: 97.2°)  
 — C90 - C270 (Half-value Angle: 89.8°)