



Technical specification

Arm-Light for outdoor use with 16 high power LEDs. High quality transparent polycarbonate lens with flood beam spread. Housing of Aluminum die-cast for efficient cooling of the LEDs. Built in electronic gear.

Model and colors

Available in Grey colour. Other colours on request.

Area of use

Suitable for signboard lighting. Also possible to install fixture on a standing position (horizontal).


Technical data

Mains (input) voltage	220-240 V
Total weight	3 kg
Form of protection	IP 65
Color temperature	3 000 or 4 000 K
Luminaire output	2354 lm
Lamp type	LED
Operating position	Vertical, tilting
Energy consumption	39 W
Control gear	Electronic
Ballast	Built in
Lens	Transparent Polycarbonate
Beam spreads	Flood

Art no	Description	Color
177-500-30	Flood	Grey


Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.

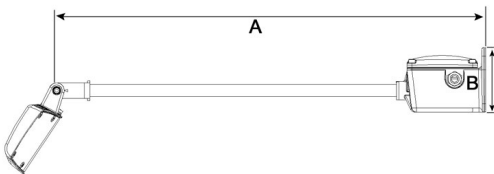

A 700 B 105 C 196 D 196 (mm)

Flood 85°/44°

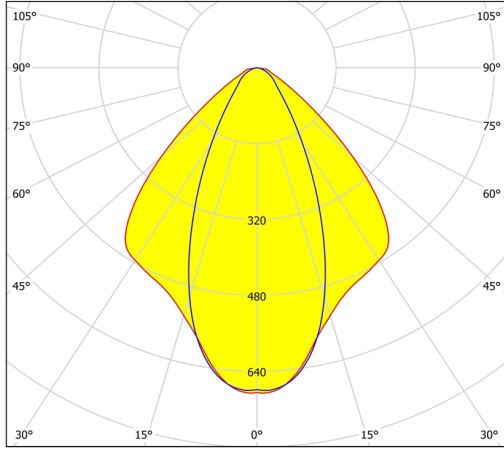

cd/klm
 — C0 - C180 — C90 - C270

0.5	0.41 0.92	E(0°) E(C90) E(C0)	7808 22.2° 42.6°	3099 1566
1.0	0.82 1.84	E(0°) E(C90) E(C0)	22.2° 42.6°	1952 775 391
1.5	1.22 2.76	E(0°) E(C90) E(C0)	22.2° 42.6°	868 344 174
2.0	1.63 3.68	E(0°) E(C90) E(C0)	22.2° 42.6°	488 194 98
2.5	2.04 4.60	E(0°) E(C90) E(C0)	22.2° 42.6°	312 124 63
3.0	2.45 5.52	E(0°) E(C90) E(C0)	22.2° 42.6°	217 86 43

Distance [m] Cone Diameter [m] Illuminance [lx]

— C0 - C180 (Half-value Angle: 85.2°)
 — C90 - C270 (Half-value Angle: 44.4°)