



Technical specification

Display light with mid power LEDs. Housing of Aluminum die-cast for efficient cooling of the LEDs. Separate NL Power LED electronic gear for optimal life time and light flow performance.


Model and colors

Available in Grey colour.

Technical data


| | |
|-----------------------------|-------------------|
| Mains (input) voltage | 220-240 V |
| Form of protection | IP 20, class III |
| Color temperature | 3 000K K |
| Color rendering index (CRI) | 80+ |
| Luminaire output | 1219 lm |
| Light source | LED |
| Operating position | Vertical, tilting |
| Energy consumption | 15 W |
| Driver | Separate |
| Safety glass | Included |
| Beam spreads | Flood |

| Art no | Description | Color |
|-------------|-------------|-------|
| 261-101-001 | Dino mini | Grey |

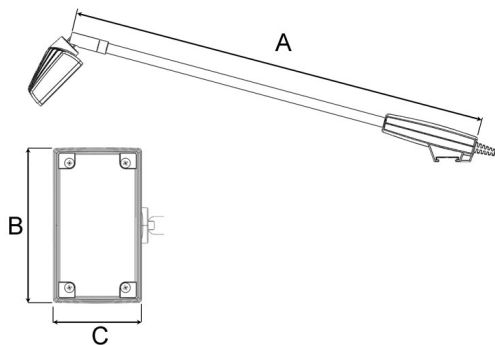

A 364 B 91 C 52 (mm)

Flood, 104°

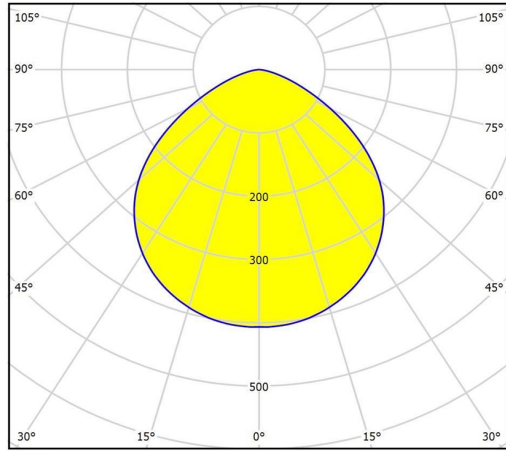

cd/klm
 — C0 - C180 — C90 - C270

| | | | | |
|-----|------|----------------|-------|-------------|
| 0.5 | 1.28 | E(0°) E(C0) | 52.1° | 1983 230 |
| 1.0 | 2.57 | E(0°) E(C0) | 52.1° | 496 57 |
| 1.5 | 3.85 | E(0°) E(C0) | 52.1° | 220 26 |
| 2.0 | 5.14 | E(0°) E(C0) | 52.1° | 124 14 |
| 2.5 | 6.42 | E(0°) E(C0) | 52.1° | 79 9 |
| 3.0 | 7.71 | E(0°) E(C0) | 52.1° | 55 6 |

Distance [m] Cone Diameter [m] Illuminance [lx]
 — C0 - C180 (Half-value Angle: 104.2°)