



Technical specification

Pendulum with incorporated electronic gear for LED lamps. High quality cylindrical reflector with die-cast aluminum for optimal stability and low weight.

Model and colors


Lampshade available in brushed aluminium. Mounting for monopoint or track. Cable always in black.

Area of use

Pendulum for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	8,9 kg
Form of protection	IP 20, class I
Color temperature	3 000/ 4 000 K
Color rendering index (CRI)	90
Luminaire output	3700 lm
Light source	LED
Operating position	Vertical
Energy consumption	56 W
Start time	Instant
Driver	Built in
Optics	Transparent Polycarbonate
Beam spreads	Spot, Medium, Flood

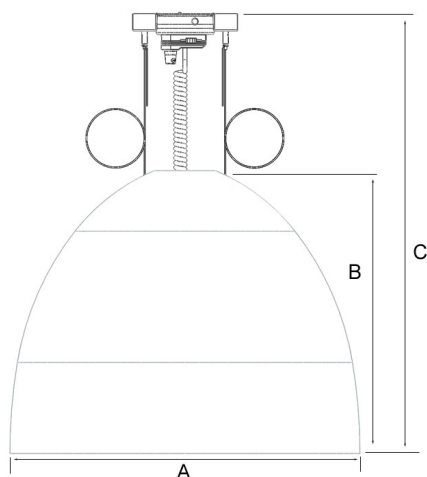

A 600 B 483 C 600 (mm)


Art no	Description	Color
221-505-20	Globe 24L Maxi, Spot	Black
221-505-32	Globe 24L Maxi, Spot	Dark Grey
221-506-20	Globe 24L Maxi, Medium	Black
221-506-32	Globe 24L Maxi, Medium	Dark Grey
054-70-10	Monopoint with Bracket	White
054-70-20	Monopoint with Bracket	Black
054-70-30	Monopoint with Bracket	Grey
054-71-10	Track bracket	White
054-71-20	Track bracket	Black

Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity. North American versions also available.

Nordic Light Pendulum lights, Globe 24L Maxi

Spot, 12°

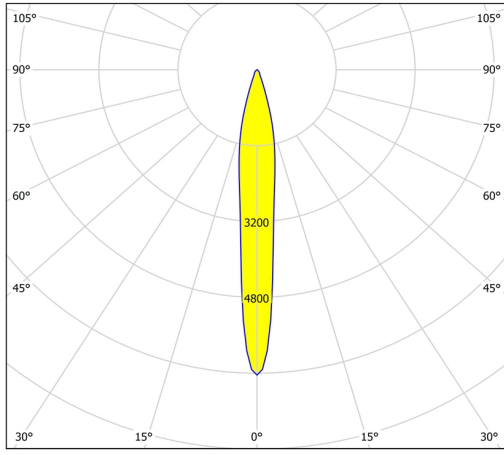


cd/klm
 — C0 - C180 — C90 - C270

Distance [m]	Cone Diameter [m]	Illuminance [lx]
0.5	0.11	E(0°) 108165 E(C0) 6.0° 53235
1.0	0.21	E(0°) 27041 E(C0) 6.0° 13309
1.5	0.32	E(0°) 12018 E(C0) 6.0° 5915
2.0	0.42	E(0°) 6760 E(C0) 6.0° 3327
2.5	0.53	E(0°) 4327 E(C0) 6.0° 2129
3.0	0.63	E(0°) 3005 E(C0) 6.0° 1479

Distance [m] Cone Diameter [m] Illuminance [lx]
 — C0 - C180 (Half-value Angle: 12.0°)

Medium, 32°

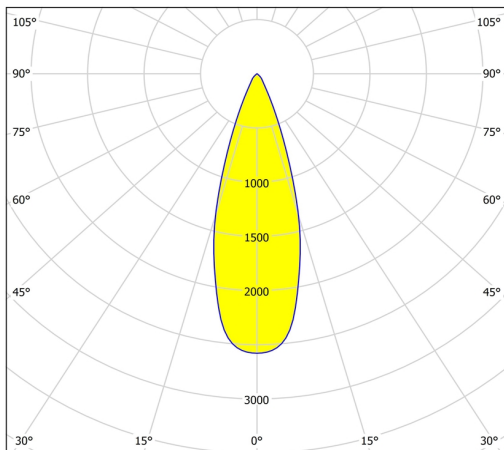

cd/klm
 — C0 - C180 — C90 - C270

Distance [m]	Cone Diameter [m]	Illuminance [lx]
0.5	0.29	E(0°) 43319 E(C0) 16.1° 19367
1.0	0.58	E(0°) 10830 E(C0) 16.1° 4842
1.5	0.87	E(0°) 4813 E(C0) 16.1° 2152
2.0	1.15	E(0°) 2707 E(C0) 16.1° 1210
2.5	1.44	E(0°) 1733 E(C0) 16.1° 775
3.0	1.73	E(0°) 1203 E(C0) 16.1° 538

Distance [m] Cone Diameter [m] Illuminance [lx]
 — C0 - C180 (Half-value Angle: 32.2°)