

Technical specification

Linear down light for LED tubes. Reflector with flood beam spread. Housing of Powder painted aluminium.

Model and colors

Available in grey.


Area of use

LED light for indoor ceiling or horizontal wire mounting applications. Suitable for general lighting.



Technical data

Mains (input) voltage	220-240 V
Total weight	2 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Color rendering index (CRI)	80+
Luminaire output	4200 lm
Light source	LED
Operating position	Vertical
Lamp holder	NLAB Standard
Energy consumption	34 W
Control gear	Electronic
Start time	Instant
Driver	Included
Reflector	High quality anodized reflector
Optics	
Beam spreads	Flood

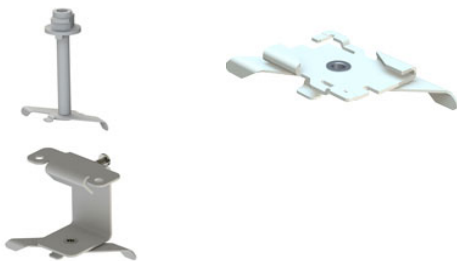


Art no	Description	Color
223-5xx	Ibis LED 4000,830, 220-240V, for Track mounting	Grey

Note

Product also available in higher power levels. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Please ask Nordic Light for latest availability update.

For latest performance data please download datasheet from www.nordiclight.com

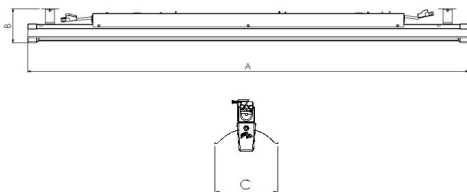

A 1491 B 115 C 141 (mm)