



**Technical specification**

Linear down light for LED tubes. Reflector with flood beam spread. Housing of Powder painted aluminium.

**Model and colors**


Available in grey.

**Area of use**

LED light for indoor applications, suitable for general lighting.

**Technical data**

Mains (input) voltage	220-240 V
Driver output	Constant voltage 28V, Max 60W
Total weight	2 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Color rendering index (CRI)	80+
Luminaire output	6700 lm
Light source	LED
Operating position	Vertical
Lamp holder	NLAB Standard
Energy consumption	59 W
Control gear	Electronic
Start time	Instant
Driver	Included
Reflector	High quality anodized reflector
Optics	
Beam spreads	Flood

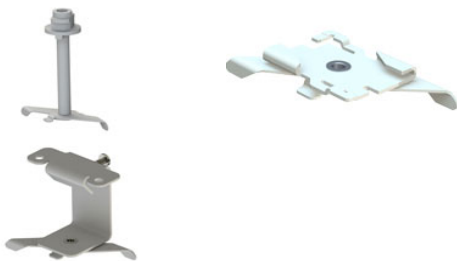


Art no	Description	Color
223-5xx	Ibis LED 7000,830, 220-240V, for Track mounting	Grey

**Note**

Product also available in higher power levels. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Please ask Nordic Light for latest availability update.

**For latest performance data please download datasheet from [www.nordiclight.com](http://www.nordiclight.com)**

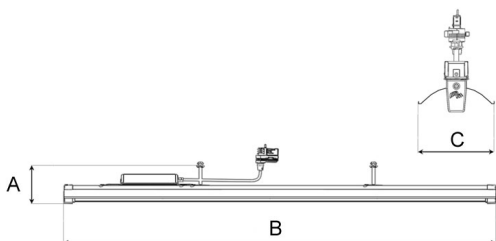

A 131 B 1492 C 151 (mm)