

Technical specification

Linear down light for LED tubes with separate electronic gear for LED. Reflector with flood beam spread. Housing of powder painted sheet metal. Built in electronic.

Model and colors

Available in white.

Area of use

LED light for indoor functional ceiling. Suitable for general lighting.

Technical data

Mains (input) voltage	220-240 V
LED driver output	Constant voltage 28V, Max 60W
Total weight	4,57 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Color rendering index (CRI)	80+
Luminaire output	3800 lm
Light source	LED
Operating position	Vertical
Lamp holder	NLAB Standard
Energy consumption	34 W
Start time	Instant
Reflector	High quality anodized reflector
Beam spreads	Flood

Art no	Description	Color
204-5xx	GRID LED 1700mm, 830 ¹	White
204-5xx	GRID LED 1700mm, 835 ¹	White
204-5xx	GRID LED 1700mm, 840 ¹	White
204-5xx	GRID LED 1900mm, 830 ²	White
204-5xx	GRID LED 1900mm, 835 ²	White
204-5xx	GRID LED 1900mm, 840 ²	White

Note


¹ Driver included

² Driver separate

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.

For latest performance data please download datasheet from www.nordiclight.com

Grid LED 4000, 830 71°/95°

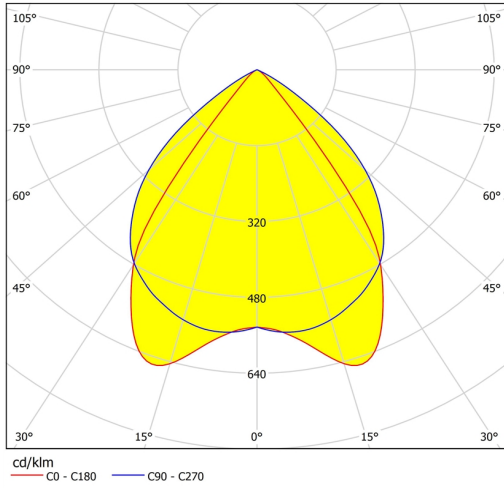

Grid LED 4000, 840 71°/95°

