



Technical specification

Linear led light. Housing of powder painted and anodized aluminum steel.

Model and colors

Available in grey.

Area of use

Fixture for outdoor/indoor environments. Parking lots , garages and industrial workshops.

Technical data

Mains (input) voltage	220-240 V
Total weight	3,5 kg
Form of protection	IP 65
Color temperature	4 000 K
Color rendering index (CRI)	80+
Luminaire output	3300 lm
Light source	LED
Operating position	Vertical
Energy consumption	35 W
Start time	Instant
Driver	Electronic, included
Beam spreads	38/58 degrees


Art no	Description	Color
255-510-30	Kite II Medium	Grey
255-511-30	Kite II Flood	Grey

Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.


Please ask Nordic Light for latest availability update.

For latest performance data please download datasheet from www.nordiclight.com

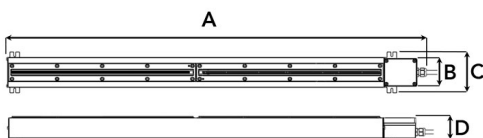


A 1230 B 87 C 119 D 68 (mm)

Medium, 104°/38°

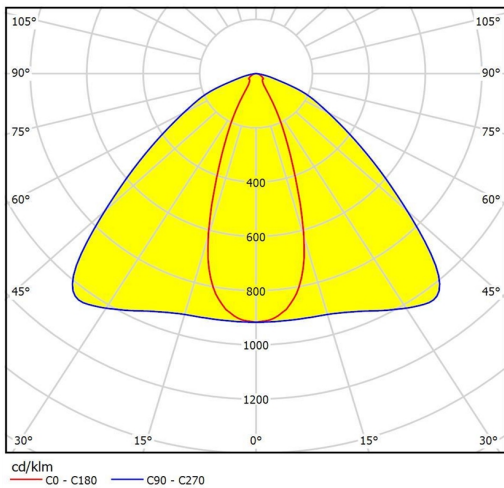

Distance [m]	Cone Diameter [m]		Illuminance [lx]		
	C0 - C180 (Half-value Angle: 37.8°)	C90 - C270 (Half-value Angle: 104.0°)	E(0°)	E(C90) 52.0°	E(C0) 18.9°
0.5	1.28	0.34	13421	1793	5706
1.0	2.56	0.68	3355	448	1426
1.5	3.84	1.03	1491	199	634
2.0	5.12	1.37	839	112	357
2.5	6.40	1.71	537	72	226
3.0	7.68	2.05	373	50	158

Flood, 129°/58°

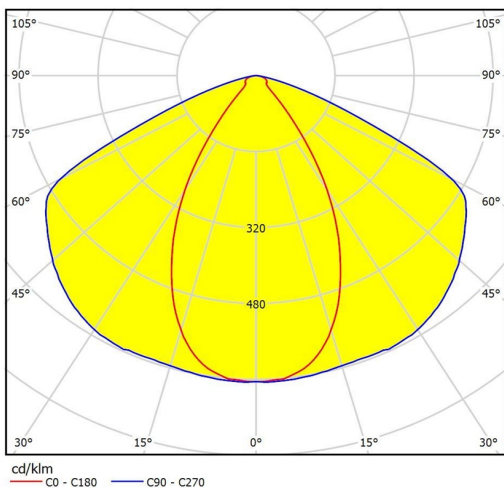

Distance [m]	Cone Diameter [m]		Illuminance [lx]		
	C0 - C180 (Half-value Angle: 57.6°)	C90 - C270 (Half-value Angle: 128.8°)	E(0°)	E(C90) 64.4°	E(C0) 28.8°
0.5	2.09	0.55	9378	384	3175
1.0	4.17	1.10	2344	96	794
1.5	6.26	1.65	1042	43	353
2.0	8.35	2.20	586	24	198
2.5	10.44	2.75	375	15	127
3.0	12.52	3.30	260	11	88