



Spot			Medium			Flood		
15°			30°			53°		
m	ø	lux	m	ø	lux	m	ø	lux
1.0	0.26	8947	1.0	0.54	2356	1.0	1.00	980
2.0	0.53	2237	2.0	1.09	589	2.0	2.00	245
3.0	0.79	994	3.0	1.63	262	3.0	3.00	109

Clamped 6L

Technical specification

Portable fixture with six high power LEDs. High quality transparent Polycarbonate lens with three beam spreads. Anti dazzle shade for reduced glare included as standard. Housing of Aluminum die-cast for efficient cooling of the LEDs. Integrated NL Power LED electronic ballast for optimal life time and light flow performance.

Model and colors Available in white.


Area of use Portable LED fixture for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	0,60 kg
Form of protection	IP 20, class II
Color temperature	3 500 K
Light source	LED
Operating position	Universal
Control gear	Electronic
Start time	Instant
Driver	Built in
Optics	Transparent Polycarbonate
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
148-503-10	Spot	White
148-504-10	Medium	White
148-505-10	Flood	White
189-58	Anti dazzle shade	Black

Type	Delivered lumen output (lm)	System power (W)	EEI ³
935	730	11	A+

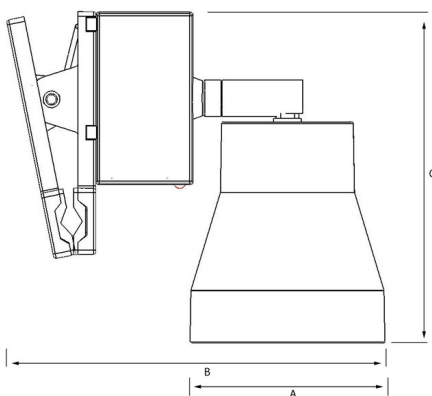

A 88 B 160 C 150 (mm)

Note

Product available in other Kelvin temperatures by request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.

Product measured without anti dazzle shade, elumdat files measured with anti dazzle shade is available at request.