

Edge 4000

Technical specification

Edge's high grade prismatic diffusor offers comfortable and low glare lighting without individual LEDs being visible. Alternatively an opaque soft diffusor can be provided. The surface mounted variant is only 14mm high. Separated NL Power LED electronic ballast for optimal life time and light flow performance.

Model and colors Surface mounted, recessed or suspended. Available in white.

Area of use Light panel for Indoor applications.

Technical data

Total weight	4 kg
Form of protection	IP 20, class III
Color temperature	3 000 K
Light source	LED
Start time	Instant
Driver	Stand alone, included

Art no	Description	Color
301-5xx-10	830 Prism diffusor	White
301-5xx-10	830 Soft diffusor	White
301-5xx-10	840 Prism diffusor	White
301-5xx-10	840 Soft diffusor	White
301-520-10	Surface mounted frame	White
047-273	Suspension kit	

Prism		Soft	
90°		114°	
m	∅	m	∅
1.0	2.00	1.0	3.10
2.0	4.00	2.0	6.21
3.0	6.00	3.0	9.31


Type	Delivered lumen output (lm)	Power (W)	EEI ³
830	3900	28	A++
840	4200	27	A++

Note

*Product available in other Kelvin temperatures on request.

Product available with DALI option on request.

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.

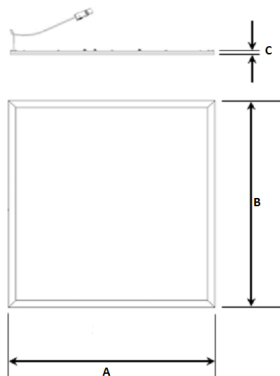

A 595 B 595 C 14 (mm)