

## Flexo R COB 3000



### Technical specification

Tiltable and rotating down light with chip on board and separated NL Power LED electronic ballast for optimal life time and light flow performance. High quality reflector with four different beam spreads. Lamp housing of die-cast aluminium for optimal cooling and low weight.

**Model and colors** Available in white, black and grey.


**Area of use** Down light for indoor applications.

### Technical data

Mains (input) voltage	220-240 V
Total weight	0.9 kg
Form of protection	IP 20, class III
Color temperature	3000 K
Color rendering index (CRI)	90
Light source	LED
Operating position	360°/60°
Start time	Instant
Driver	Stand alone, included
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Spot		Medium		Flood		Wide Flood	
14°		25°		37°		57°	
m	ø	m	ø	m	ø	m	ø
1.0	0.25	1.0	0.44	1.0	0.68	1.0	1.08
2.0	0.51	2.0	0.88	2.0	1.35	2.0	2.15
3.0	0.76	3.0	1.32	3.0	2.03	3.0	3.23

Art no	Description	Color
306-500-10	Spot	White
306-500-20	Spot	Black
306-500-30	Spot	Grey
306-501-10	Medium	White
306-501-20	Medium	Black
306-501-30	Medium	Grey
306-502-10	Flood	White
306-502-20	Flood	Black
306-502-30	Flood	Grey
306-503-10	Wide flood	White
306-503-20	Wide flood	Black
306-503-30	Wide flood	Grey

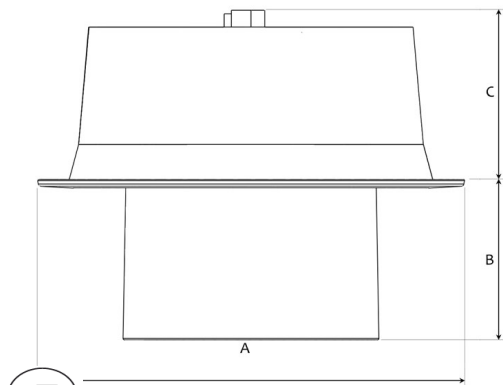

Saw instruction: ø 165 mm

A 176 B 65 C 70 (mm)

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
830	2900	26	A++
930	2900	30	A+
840	3000	26	A++
940	2900	29	A+

### Note

Product available with meat or bread COB on request. Product available in other Kelvin temperatures on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.